


Basic series


10 mm embeddable

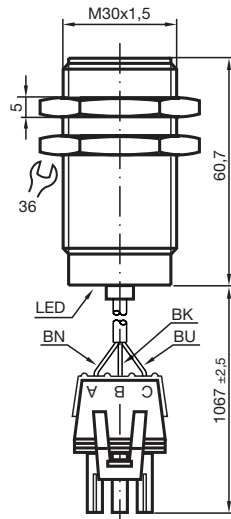

| | | |
|-----------------------------------|-------------------------------|---------------|
| Switching element function | NPN | Make function |
| Rated operating distance s_n | 10 mm | |
| Installation | embeddable | |
| Assured operating distance s_a | 0 ... 8,1 mm | |
| Reduction factor r_{AI} | 0,3 | |
| Reduction factor r_{Cu} | 0,3 | |
| Reduction factor r_{V2A} | 0,8 | |
| Operating voltage U_B | 10 ... 30 V | |
| Switching frequency f | 0 ... 200 Hz | |
| Reverse polarity protection | yes | |
| Short circuit protection | pulsing | |
| Voltage drop U_d | ≤ 3 V | |
| Operating current I_L | 0 ... 200 mA | |
| Off-state current I_r | 0 ... 0,5 mA typ. | |
| No-load supply current I_0 | ≤ 20 mA | |
| Indication of the switching state | all direction LED, yellow | |
| Standards | EN 60947-5-2 | |
| Ambient temperature | -25 ... 70 °C (248 ... 343 K) | |
| Connection type | 2 m, PVC cable | |
| Core cross-section | 0.34 mm ² | |
| Housing material | brass, nickel-plated | |
| Sensing face | PBT | |
| Protection degree | IP67 | |

Connection_type:

E / E0



450336_ENG.xml

2003-03-25

www.pepperl-fuchs.com

PEPPERL+FUCHS GmbH