

Model Number


V19-G-BK10M-PUR-U

Cable socket, M12, 8-pin, PUR-cable

Features

- UL Recognized Component
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold-plated and machined contacts
- Flame resistant cable
- Halogen-free
- Resistant to microbes and hydrolysis
- Protection degree IP67 / IP68 / IP69K

Dimensions

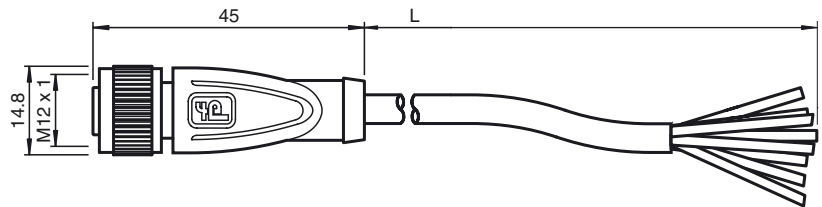

Technical data

General specifications

Number of pins	8
Connection 1	female connector
Construction type 1	straight
Threading 1	M12
Connection 2	cable end
UL File Number	E231213

Electrical specifications

Operating voltage	U_B	max. 30 V AC/DC
Operating current		max. 2 A

Ambient conditions

Ambient temperature	Body: -40 ... 90 °C (-40 ... 194 °F) cable, flexing: -20 ... 80 °C (-4 ... 176 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F)
Pollution Degree	3


Mechanical specifications

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Protection degree	IP67 / IP68 / IP69k
Material	
Contacts	CuSn / Au
Contact surface	Au
Body	TPU, green
Cable	PUR
Slotted nut	Diecast zinc
Core insulation	PP
Cable	fine-strand, flexible
Sheath diameter	Ø 6 mm
Bending radius	> 10 x cable diameter, moving > 8 x cable diameter, fixed
Color	black
Cores	8 x 0.25 mm ²
Conductor construction	14 x 0.15 mm Ø
Length	L 10 m
Flammability	
Contact material	HB
Housing	V-2
Cable	FT2

Compliance with standards and directives

Standard conformity	
Flammability	Grip: UL 94 Cable: UL 1581 Section 1100; IEC 60332-1-2:2004
Halogen-free	IEC†60754-1:1994

Electrical connection



1	WH
2	BN
3	GN
4	YE
5	GY
6	PK
7	BU
8	RD

Approvals and certificates

UL approval UL Recognized General purpose

Maximum permissible operating voltage ≤ 30 V

Maximum permissible ambient temperature ≤ 80 °C (≤ 176 °F)

Release date: 2012-01-11 13:47 Date of issue: 2012-02-13 456505_eng.xml