

**Features**


- 4-channel
- Inputs Ex ia
- Power supply for 2- or 3-wire transmitters with 4 mA ... 20 mA
- Supply circuit 15 V (20 mA)
- Input from active signals of 4-wire transmitters
- Installation in suitable enclosures in Zone 1 or Zone 21
- HART communication via field bus or service bus
- Simulation mode for service operations (forcing)
- Line fault detection (LFD)
- Permanently self-monitoring

**Function**


The transmitter power supply feeds 2- and 3-wire transmitters. Active signals from separately powered field devices and 4-wire transmitters can be connected. Open and short-circuit line faults are detected. The intrinsically safe inputs are galvanically isolated from the bus and the power supply.

**Assembly**

Front view

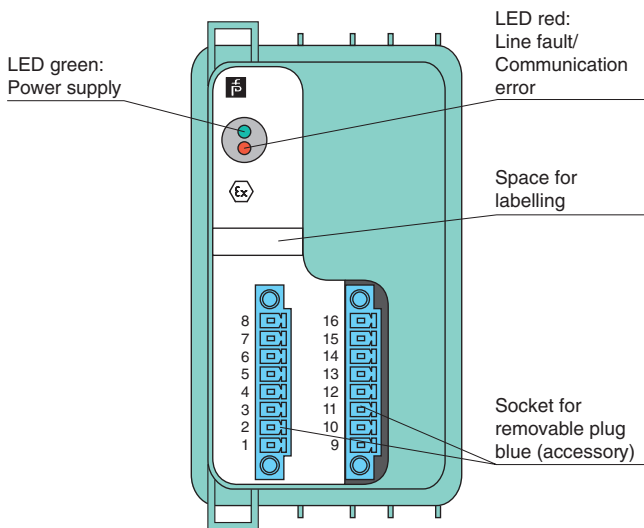

**Connection**

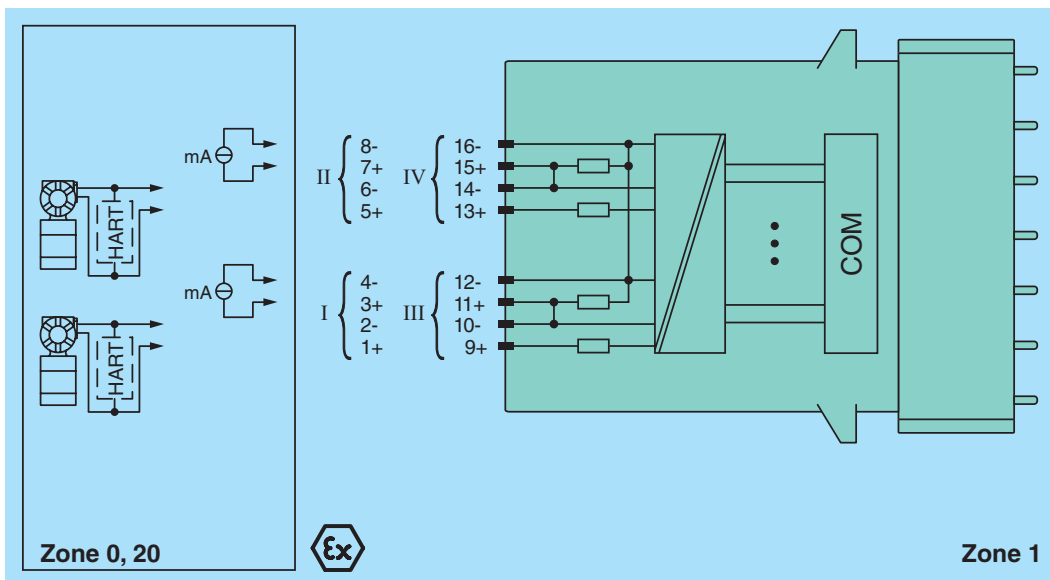

Release date 2012-12-10 11:49 Date of issue 2012-12-10 542091\_eng.xml

<b>Supply</b>		
Connection	backplane bus	
Rated voltage	12 V DC , only in connection with the power supplies FB92**	
Power consumption	3 W	
<b>Internal bus</b>		
Connection	backplane bus	
Interface	manufacturer specific bus to standard Com Unit/gateway	
<b>Input</b>		
Suitable field devices	transmitters for pressure, differential pressure, level, flow, temperature, etc.	
Connection	terminals 1+, 2- / 5+, 6- / 9+, 10 - / 13 +, 14 - HART supply circuit terminals 3+, 4- / 7+, 8- / 11+, 12- / 15+, 16- active field devices	
Input resistance	15 Ω (stat.) , no HART for separately powered field devices	
Transmitter supply voltage	min. 15 V at 20 mA	
Line fault detection	Parameterization range 0 ... 26 mA Ex works settings: line fault < 0.5 mA, short circuit > 22 mA	
<b>Transfer characteristics</b>		
Deviation	0.1 % of the input signal range at 20 °C (68 °F)	
Influence of ambient temperature	0.01 %/K of the input signal range	
Resolution	12 Bit (0 ... 26 mA)	
Refresh time	approx. 80 ms (4 channels) 130 ms during HART	
<b>Indicators/settings</b>		
LED indicator	LED green: supply LED green flashing: calibration error LED red: line fault Red LED, flashing communication error	
Labeling	space for labeling at the front	
Coding	mechanical coding at the front socket , optional	
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2004/108/EC	EN 61326-1	
<b>Conformity</b>		
Electromagnetic compatibility	NE 21	
Protection degree	IEC 60529	
Environmental test	EN 60068-2-14	
Shock resistance	EN 60068-2-27	
Vibration resistance	EN 60068-2-6	
Damaging gas	EN 60068-2-42	
Relative humidity	EN 60068-2-56	
<b>Ambient conditions</b>		
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)	
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)	
Relative humidity	95 % non-condensing	
Shock resistance	shock type I, shock duration 11 ms, shock amplitude 50 m/s <sup>2</sup> , number of shock directions 6, number of shocks per direction 100	
Vibration resistance	frequency range 5 ... 500 Hz, amplitude 5 ... 13.2 Hz ± 1.5 mm, 13.2 ... 100 Hz 1g, sweep rate 1 octave/min, duration 10 sweeps 5 Hz - 100 Hz - 5 Hz	
Damaging gas	for plugs: 21 days in 25 ppm SO <sub>2</sub> , at 25 °C and 75 % rel. humidity, device G3	
<b>Mechanical specifications</b>		
Protection degree	IP20 (module) , a separate housing is required acc. to the system description	
Connection	device plug (accessories) - removable terminals - plug with screw flange - wiring connection: spring terminals: (0.14 ... 1.5 mm <sup>2</sup> ), screw terminals: (0.08 ... 1.5 mm <sup>2</sup> )	
Mass	approx. 750 g	
Dimensions	57 x 107 x 132 mm (2.2 x 4.2 x 5.2 in)	
<b>Data for application in connection with Ex-areas</b>		
EC-Type Examination Certificate	PTB 97 ATEX 1074 U , PTB 97 ATEX 1075 (system) , for additional certificates see www.pepperl-fuchs.com	
Group, category, type of protection	Ⓔ II 2(1) G Ex d [ia] IIC , [Ex iaD]	
<b>Supply</b>		
Voltage	U <sub>o</sub>	28 V
Current	I <sub>o</sub>	90 mA
Power	P <sub>o</sub>	626 mW (linear characteristic)
<b>Input</b>		
Voltage	U <sub>o</sub>	0.7 V

Release date 2012-12-10 11:49 Date of issue 2012-12-10 542091\_eng.xml

Current	$I_o$	2.3 mA
Power	$P_o$	2 mW (trapezoid characteristic curve)
<b>Electrical isolation</b>		
Input/power supply, internal bus		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
<b>Directive conformity</b>		
Directive 94/9/EC		EN 60079-0, EN 60079-1, EN 60079-11, EN 60079-26, EN 61241-0, EN 61241-11
<b>International approvals</b>		
IECEx approval		pending
<b>General information</b>		
System information		The module has to be mounted in appropriate backplanes and housings (FB92**) in Zone 1, 2, 21, 22 or outside hazardous areas (gas or dust). Here, the corresponding EC-Type Examination Certificate has to be observed.
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .