
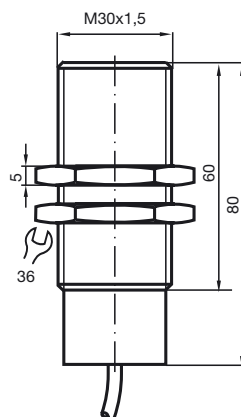
**Model Number**

NBB10-30GK-WS

Features

- Basic series
- 10 mm embeddable

Connection**Dimensions****Technical Data****General specifications**

Switching element function	AC	Make function
Rated operating distance	s_n	10 mm
Installation	embeddable	
Output polarity	AC	
Assured operating distance	s_a	0 ... 8.1 mm
Reduction factor r_{AI}	0.29	
Reduction factor r_{Cu}	0.26	
Reduction factor r_{V2A}	0.71	

Nominal ratings

Operating voltage	U_B	20 ... 250 V
Switching frequency	f	0 ... 25 Hz
Hysteresis	H	typ. 5 %
Short-circuit protection	no	
Voltage drop	U_d	≤ 8 V
Momentary current (20 ms, 0.1 Hz)	0 ... 1600 mA	
Operating current	I_L	5 ... 200 mA
Off-state current	I_r	0 ... 1.5 mA typ.

Standard conformity

Standards	IEC / EN 60947-5-2:2004
-----------	-------------------------

Ambient conditions

Ambient temperature	-25 ... 70 °C (248 ... 343 K)
---------------------	-------------------------------

Mechanical specifications

Connection type	2 m, PVC cable
Core cross-section	0.75 mm ²
Housing material	PBT
Sensing face	PBT
Protection degree	IP68

Note

¹⁾ In the temperature range below 0 °C, permissible operating voltage U_b 80...253 V
 Safety fuse ≤ 0.8 A (quick-blow) according to IEC 60127-2
 Sheet 1
 Recommendation: after a short circuit, check that the device is functioning correctly.