



Model Number


NBB8-F33-E2-M-150MM-3DT04

Mobile Equipment Series

Features

- 8 mm embeddable
- Increased operating distance
- Extended temperature range - 40 ... +85 °C
- 3-pin Deutsch connector (DT04)
- 100 V/m radiated field immunity


Connection



Wire colors

A	BN
B	BU
C	BK

Dimensions

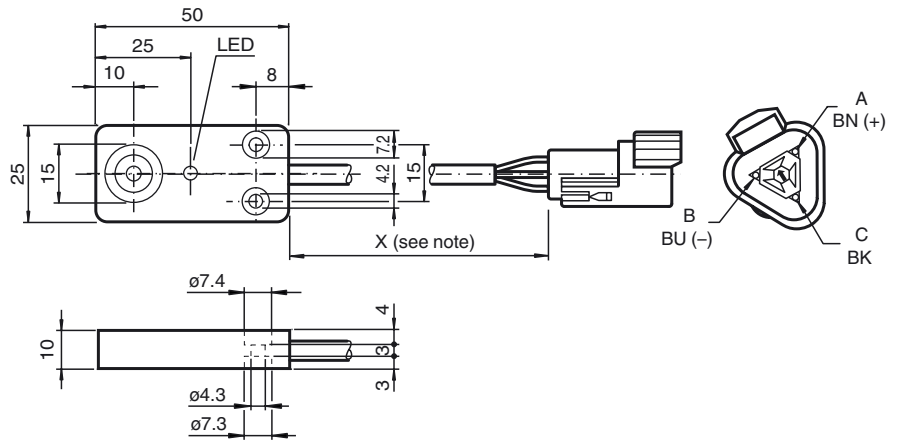

Technical Data

General specifications

Switching element function	PNP	NO
Rated operating distance	s_n	8 mm
Installation	embeddable	
Output polarity	DC	
Assured operating distance	s_a	0 ... 6.48 mm
Reduction factor r_{Al}	0.3	
Reduction factor r_{Cu}	0.2	
Reduction factor r_{303}	0.6	

Nominal ratings

Operating voltage	U_B	5 ... 60 V DC
Switching frequency	f	0 ... 350 Hz
Hysteresis	H	typ. 5 %
Reverse polarity protected	reverse polarity protected	
Short-circuit protection	pulsing	
Voltage drop	U_d	≤ 2 V
Operating current	I_L	0 ... 200 mA
Off-state current	I_r	0 ... 0.1 mA
No-load supply current	I_0	≤ 10 mA
Indication of the switching state	LED yellow	

Functional safety related parameters

MTTF _d	1140 a
Mission Time (T_M)	20 a
Diagnostic Coverage (DC)	0 %

Ambient conditions

Ambient temperature	-40 ... 85 °C (-40 ... 185 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)

Mechanical specifications

Connection type	Cable connector Deutsch DT04 , 3-pin with PUR cable 150 mm
Core cross-section	0.75 mm ²
Housing material	PBT
Sensing face	PBT
Protection degree	IP67 / IP69K
Note	Tightening torque: 5 Nm

Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007

Approvals and certificates

UL approval	cULus Listed, General Purpose
e1 Type approval	2006/28/EG

Release date: 2011-09-09 16:50 Date of issue: 2011-09-09 913518_eng.xml

Installation hint

Emitted interference and interference immunity in accordance with motor vehicle directive 2006/28/EG (e1 Type approval)
 Interference immunity in accordance with DIN ISO 11452-2: 100 V/m
 Frequency band 20 MHz up to 2 GHz

Mains-borne interference in accordance with ISO 7637-2: Pulse 1 2a 2b 3 a 3b 4 5
 Severity level III III III III III III IV
 Failure criterion C A C A A A C

EN 61000-4-2: CD: 8 kV / AD: 15 kV
 Severity level IV IV
 EN 61000-4-3: 30 V/m (80...2500 MHz)
 Severity level IV
 EN 61000-4-4: 2 kV
 Severity level III
 EN 61000-4-6: 10 V (0.01...80 MHz)
 Severity level III
 EN 55011: Class A

Release date: 2011-09-09 16:50 Date of issue: 2011-09-09 913518_eng.xml