

Features

- Extended temperature range for indoor/outdoor use
- Fiber or Cat5 KVM communication for keyboard and touchscreen
- Modular design for field maintainability
- Solution for Class I/Div 1 areas
- Utilizes 6000 Series Type X purge
- Variety of keyboard and mounting options
- Watershed housing allows for proper drainage
- Widescreen 16:10 aspect ratio


Application

The VisuNet IND Edge is a universal design that is well suited for many applications. Unit features a hazardous area KVM for keyboard and touchscreen inputs. The intrinsically safe touchscreen properly protects the touchscreen interface.

Specifically designed for manufacturing environments where dust, bacteria, water, and other undesirable materials might accumulate, the sloped enclosure provides washdown solutions with proper drainage to prevent standing water. The formed lip enclosure opening prevents the flow of liquid or other contaminants from entering the enclosure.



Dimensions

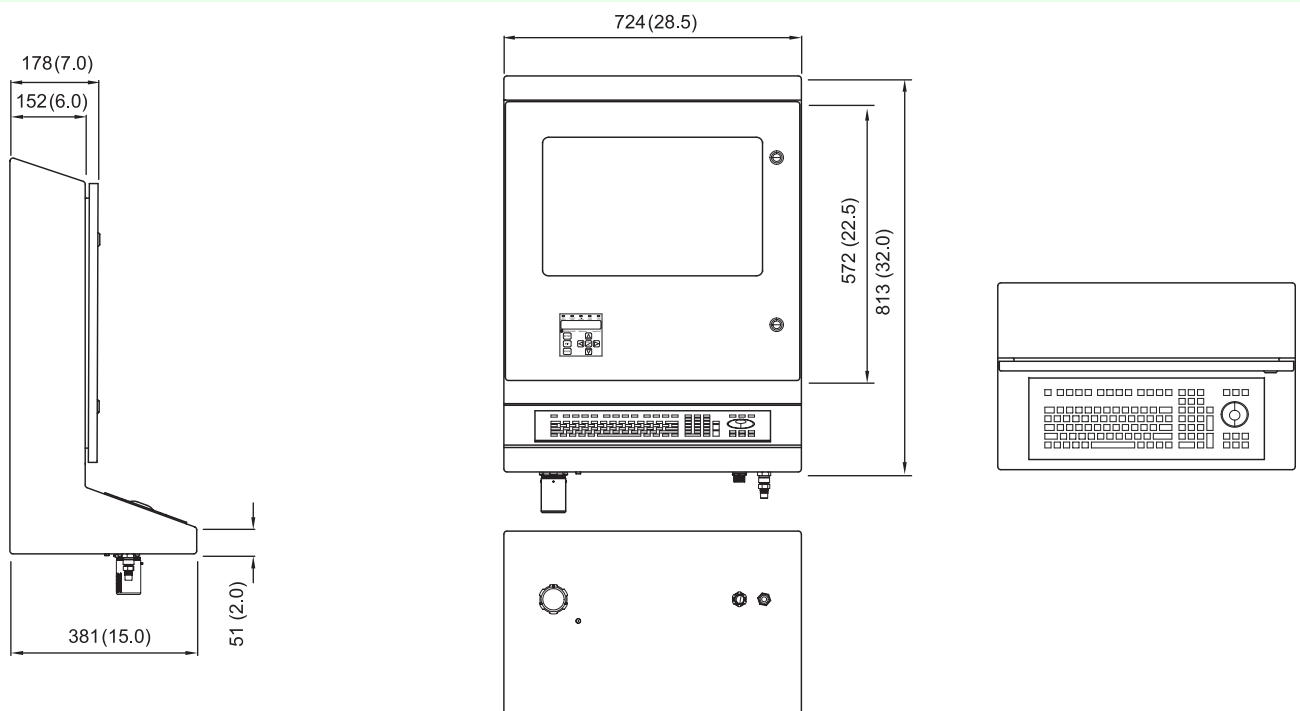

General specifications	
Distance	Transmitter "K3": 300 m (1000 ft) Transmitter "K4": 120 m (400 ft) Transmitter "K5": 200 m (650 ft), 62.5 μ multimode; 400 m (1300 ft), 50.0 μ multimode
Supply	
Connection	Monitor: power, CAT5, fiber (LC)
Power consumption	Main unit: 70 W max, 100 ... 240 VAC, 50 ... 60 Hz; 20-30 VDC Transmitter "K3": PS2 power Transmitter "K4": 5 VDC @ 10 W, max Transmitter "K5": 5 VDC @ 10 W, max
Indicators/operating means	
Indicators	Transmitter "K3": video check LED Transmitter "K4": video check LED; front panel - power Transmitter "K5": video check LED; front panel - power
Display	
Screen diagonal	22" (55.9 cm)
Response time	15 ms
Resolution	1680 x 1050
Color depth	24 bit (16.7 M) color
Contrast	1000:1
Brightness	Standard: 300 nit
Reading angle	178° in all directions
Life span	Back lamp life: 50,000 hrs typical half life
Input devices	Transmitter "K3": VGA - HD15M/F; 2 x PS2 (keyboard & mouse); 1 x RS232 (touchscreen); 1 x RJ45 (CAT5e/6) Transmitter "K4": 29-pin DVI-D; 2 x USB Type A (keyboard, mouse/touchscreen); 1 x RS232 (touchscreen); 1 x RJ45 (CAT5e/6) Transmitter "K5": 29-pin DVI-D; 2 x USB Type A (keyboard, mouse/touchscreen); 1 x RS232 (touchscreen); fiber optic (multimode) LC connectors
Serial data	
Baud rate	19.2 KBd max
Flow control	RTS, CTS, DTR, DSR
Directive conformity	
Electromagnetic compatibility	
Directive 89/336/EEC	EN55022A, EN61000-6-2, EN61000-3-2, EN61000-3-3 (main unit) EN55022, EN55024, IEC61000-4-2, IEC61000-4-3, IEC61000-4.4, IEC61000-4-5, EN61000-3-2, EN61000-3-3 (KVM transmitters)
Low voltage	
Directive 73/23/EEC	EN60950 (KVM transmitters)
Ambient conditions	
Operating temperature	-20 ... 50 °C (-4 ... 122 °F)
Storage temperature	-20 ... 60 °C (-4 ... 140 °F)
Relative humidity	0 ... 90% (noncondensing)
Mechanical specifications	
Protection degree	Nema Type 4X , Type 4
Material	304 (UNS S30400) stainless steel , Powder coated steel
Housing	304 (UNS S30400) stainless steel , Powder coated steel
Surface	#4, 180 grit
Mass	approx. 52.16 kg (115 lbs) Empty housing ; Varies with configuration
Dimensions	813 mm x 724 mm x 381 mm (32.0 in x 28.5 in x 15.0 in) (sloping top) Volume: approx. 3.2 cu ft
Mounting	Wall or pedestal mount
International approvals	
UL approval	cULus : Class I, Division 1, Group B, C, D

Release date 2013-02-14 14:03 Date of issue 2013-02-14 t159185_eng.xml

Purge Data	
General specifications	
Series	6000
Indicators/settings	
LED indicator	Safe pressure: Blue - safe pressure is achieved Enclosure power: Green - power on; Red - power off Rapid exchange: Blue - purging is running System bypass: Yellow - bypass is activated Alarm fault: Red (blinking) - any alarm input detected; Red (solid) - 6000 series system fault
Pneumatic parameters	
Protective gas supply	Instrument grade air or inert gas
Pressure requirement	20 ... 120 psig (1.4 ... 8.3 bar) (138 ... 827 kPa) regulated
Safe pressure	Gas: 0.25" wc (6.4 mm wc) (0.625 mbar) (62 Pa)
Purge flow and enclosure pressure rate	5 SCFM @ 1.3" wc, (141 l/min @ 33 mm wc) (3.3 mbar) (324 Pa) 12 SCFM @ 2.5" wc, (340 l/min @ 64 mm wc) (6.3 mbar) (623 Pa)
Flow rate for leakage compensation	0.01 SCFM (0.30 l/min) @ 0.25" 0.2 SCFM (5.6 l/min) @ 0.75" and up (depends on enclosure seal)
Purge time (4 volume exchange)	min = 2.00 min max = 2.60 min
Mechanical specifications	
Connection type	Pneumatic : Inlet fitting to manifold: 3/8" NPT (female) Outlet fitting from manifold: 3/8" bulkhead fitting (provided)
Note	For complete specifications of the purge system see the data sheet for the 6000 Control System Type X & Ex px purge and pressurization system

Type code

K M 8 6 2 2 - A - D 1 - K 3 A C W P 5 - C K 1 U S - S 0 - N

<p>Monitor KM8622</p> <p>22 inch (55.9 cm) panel mount component</p>	<p>Screen type A Antiglare glass front, non-touch T Touch screen, resistive, 5-wire, intrinsically safe</p>	<p>Protection D1 Class I / Div 1, Groups B, C, D</p>	<p>Connection K3 KVM for VGA video included, 2 x PS/2, 1 x RS232, analog CAT x cable transmission K4 KVM for DVI-D video included, 2 x USB interface, 1 x RS232, CATx cable transmission K5 KVM for DVI-D video included, 2 x USB interface, 1 x RS232, fiber-optic transmission (multimode), 2 x LC connectors</p>	<p>Power supply AC 90 - 260 V AC, 50 - 60 Hz DC 24 V DC</p>	<p>Housing / frontplate version WP5 Piano style housing (painted steel), wall mount, service opening on front, hinges on left, extended keyboard WP6 Piano style housing (painted steel), pedestal mount, service opening on front, hinges on left, extended keyboard WS5 Piano style housing (stainless steel 304), wall mount, service opening on front, hinges on left, extended keyboard WS6 Piano style housing (stainless steel 304), pedestal mount, service opening on front, hinges on left, extended keyboard</p>	<p>Keyboard housing C Keyboard & mouse housing installed N No keyboard, no mouse</p>	<p>Keyboard / mouse version K1 Foil keyboard, no mouse K4 Foil keyboard & touchpad mouse K6 Foil keyboard & joystick K8 Foil keyboard & 50 mm optical trackball mouse</p>	<p>Keyboard layout US Keyboard, layout U.S.</p>	<p>Special accessories S0 No special accessories</p>	<p>Options N No option Y Custom, consult factory</p>
---	--	---	--	--	--	---	--	--	---	---