


## Dimensions

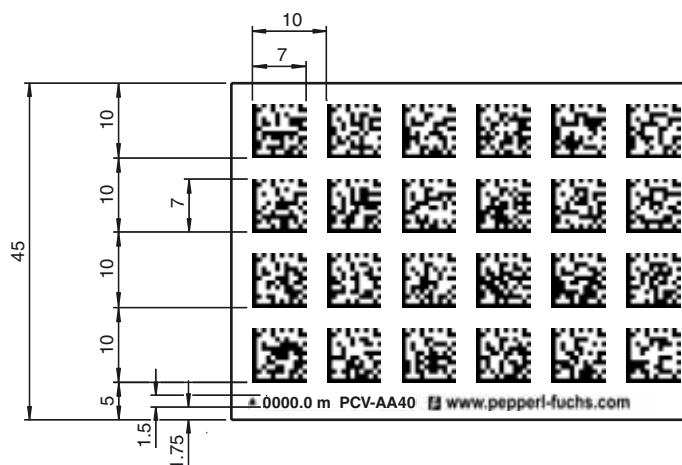

## Model Number

**PCV\*-AA40-\***

Data Matrix code tape

## Features

- High chemical resistance
- Low weight
- Self-adhesive mounting
- High temperature resistance
- High mechanical stability

## Technical data

### General specifications

Start position	0 ... 9900 m (see Order Information)
Length	6 ... 100 m (see Order Information)
Inside diameter	76 mm (role core)

### Ambient conditions

Operating temperature	-40 ... 150 °C (-40 ... 302 °F)
Installation temperature	10 ... 40 °C (50 ... 104 °F)
Environmental resistance	UV radiation Humidity Salt spray (150 h / 5%)

Chemical resistance	Oils Grease Fuels Aliphatic solvents Weak acids
---------------------	---

### Mechanical specifications

Material thickness	150 µm
Material	polyester laminate
Surface	polyester, matte
Mass	6.3 g / m
Tensile strength	≥ 270 N
Adhesive	Acrylate-based adhesive; curing 72 h
Adhesive strength	Average values (FTM2) aluminum : 24 N / 25 mm High grade stainless steel : 25 N / 25 mm ABS : 22 N / 25 mm PP : 18 N / 25 mm HD-PE : 12 N / 25 mm LD-PE : 12 N / 25 mm

## Order Informationen



Starting position

xxxxxx 0 ... 990000 cm

Absolute band width

40 45 mm (4 rows version)

Absolute band

Code: Data Matrix ECC200; matrix size 16x16

Absolute band length

xxx 6 ... 100 meter

Position Coding System, Vision Technology