Programming unit UB-PROG2



· For ultrasonic sensors series

UB500 UB2000	-18GM75 -30GM -F54	-E4 -E5	-V15
UB4000 UB6000		-l -U	. 10

- Simple TEACH-IN of the switching distances A1/A2 or the measuring window.
- Simple selection of the output function:

Window mode, normally open/normally closed function.

One switching distance, normally open/normally closed function. Monitoring of the detection range.

Programming unit UB-PROG3



· For ultrasonic sensors series


UB500	-18GM75	-E01 -E23 -E6 -E7	-V15
-------	---------	----------------------------	------

- Simple TEACH-IN of the switching distances A1/A2 or the measuring window.
- Simple selection of the output function:

Window mode, normally open/normally closed function.

One switching distance, normally open/normally closed function.


Monitoring of the detection range.

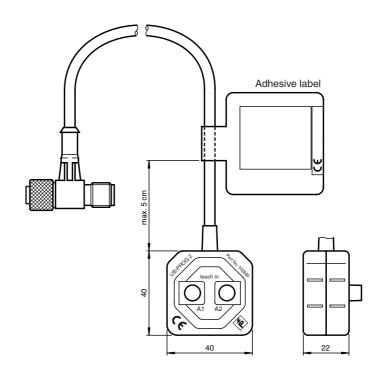

The unit can be switched from the V15 cable connection socket and the V15 plug connection on the sensor for the TEACH-IN procedure.

The switching distances/measuring window and output function can be taught in using the A1 and A2 buttons.

The taught-in switching distances and functions are retained when the programming unit is removed and/or the power is switched off.

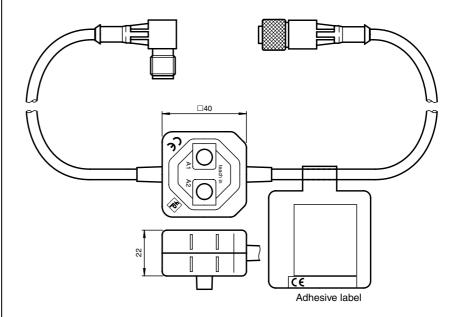

The unit can be switched from the V15 cable connection socket and the V15 plug connection on the sensor for the TEACH-IN procedure.

The switching distances/measuring window and output function can be taught in using the A1 and A2 buttons.

The taught-in switching distances and functions are retained when the programming unit is removed and/or the power is switched off.