

AS-interface Passive Distributor


4-way

- interference immune
- standard round cable
- type of protection IP 67




Model Number	VAZ-T4-G1P
Connection AS-i	terminal compartment
AS-i [mm ²]	≤ 2.5
AS-i	M12 round connector
Ambient temperature t _b [°C]	-25 ... +85
Storage temperature t _s [°C]	-25 ... +85
Type of prot. acc. to EN 60 529	IP 67
allowable shock and vibration stress	screw mounting: b ≤ 30 g , T ≤ 11 ms snap-in mounting: b ≤ 15 g , T ≤ 11 ms screw mounting: f ≤ 55 Hz , a ≤ 1 mm snap-in mounting: f ≤ 55 Hz , a ≤ 0,5 mm
Weight [g]	150
Dimensions L,W,H [mm]	80, 45, 50

Connection

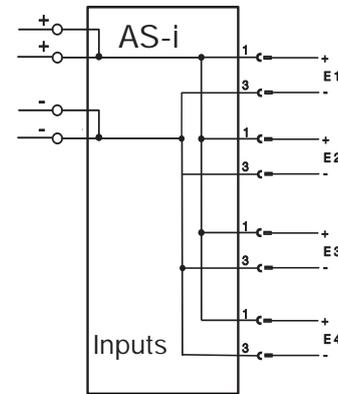

Drill hole dimensions for screw mounting

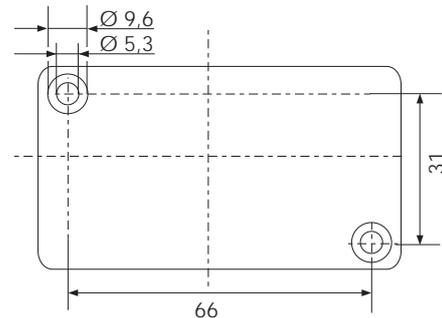

Programming information

The settings are carried out by the slaves.

Issue date 01.10.1996