




Model Number

NMB5-18GM85-US-NFE-V12


Features

- Stainless steel sensing face
- Sensing range 5 mm
- 2-wire AC/DC
- Nonferrous targets

Connection



Pinout



Wire colors

1	GN	(green)
2	RD/BK	(red/black)
3	RD/WH	(red/white)

Accessories

V12-G-YE2M-PUR-H/S

Connecting cable, 1/2" - 20 UNF, 3-pin, irradiated PUR cable


V12-G-YE5M-PUR-H/S

Connecting cable, 1/2" - 20 UNF, 3-pin, irradiated PUR cable

AB-18

Mounting aid

Dimensions

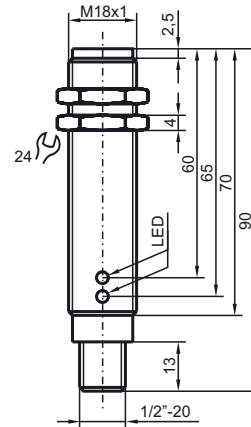

Technical Data

General specifications

Switching element function	AC/DC	NO
Rated operating distance	s_n	5 mm
Installation		flush
Output polarity		AC/DC
Assured operating distance	s_a	0 ... 4.05 mm
Actuating element		Nonferrous targets
Reduction factor r_{Al}		1
Reduction factor r_{Cu}		1.1
Reduction factor r_{304}		0
Reduction factor r_{316}		0
Reduction factor r_{Brass}		0.9

Nominal ratings

Operating voltage DC		20 ... 300 V
Operating voltage AC		20 ... 250 V
Switching frequency	f	30 Hz
Hysteresis	H	3 ... 15 typ. 5 %
Reverse polarity protection		yes
Short-circuit protection		yes
Voltage drop	U_d	≤ 7 V
Operating current	I_L	8 ... 200 mA
Off-state current	I_r	≤ 1.3 mA
Fault indication		LED, green/yellow (Alternate Flashing) - Short circuit/overload indication

Indicators/operating means

Operating display	Dual LED
	Green: power
	Yellow: output

Standard conformity

Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007
-----------	---

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
---------------------	--------------------------------

Mechanical specifications

Connection type	Device connector M12 x 1, 4-pin
Housing material	Stainless steel 1.4305 / AISI 303
Sensing face	Stainless steel 1.4305 / AISI 303
Protection degree	IP67 / IP68 / IP69K - cordset dependent according to cable specification

Approvals and certificates

UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose
CCC approval	Certified by China Compulsory Certification (CCC)