

Model Number


V1-G-5M-PVC-V1-G

Connecting cable, M12 to M12, PVC cable 4-pin

Features

- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold-plated and machined contacts
- Protection degree IP67 / IP68 / IP69K
- Suitable for 2-, 3- and 4-wire technology

Dimensions

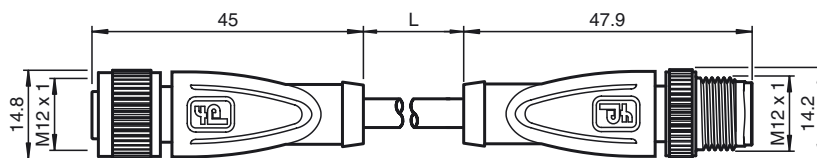

Technical data

General specifications

Number of pins	4
Connection 1	female connector
Construction type 1	straight
Threading 1	M12
Connection 2	Male connector
Construction type 2	straight
Threading 2	M12

Electrical specifications

Operating voltage	U_B	max. 250 V AC/DC
Test voltage		> 1500 V _{eff} AC
Operating current		max. 4 A
Volume resistance		< 5 m Ω


Ambient conditions

Ambient temperature		cable, fixed: -25 ... 70 °C (-13 ... 158 °F) cable, flexing: -5 ... -70 °C (23 ... -94 °F)
Pollution Degree		3

Mechanical specifications

Contact elements		spring-loaded contact socket
Pin diameter		1 mm
Protection degree		IP67 / IP68 / IP69k
Material		
Contacts		CuSn / Au
Contact surface		Au
Body		TPU, green
Cable		PVC
Slotted nut		Diecast zinc
Sleeve connector		Diecast zinc
Core insulation		PVC
Cable		fine-strand, flexible
Sheath diameter		\varnothing 4.8 mm
Bending radius		> 10 x cable diameter, appropriate for conveyor chains
Color		grey
Cores		4 x 0.34 mm ²
Conductor construction		19 x 0.15 mm \varnothing
Length	L	5 m

Electrical connection

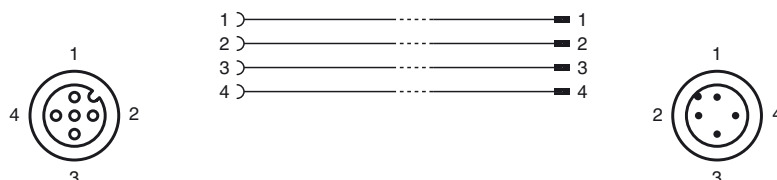

Release date: 2012-01-18 10:33 Date of issue: 2012-01-18 114701_eng.xml