


Dimensions

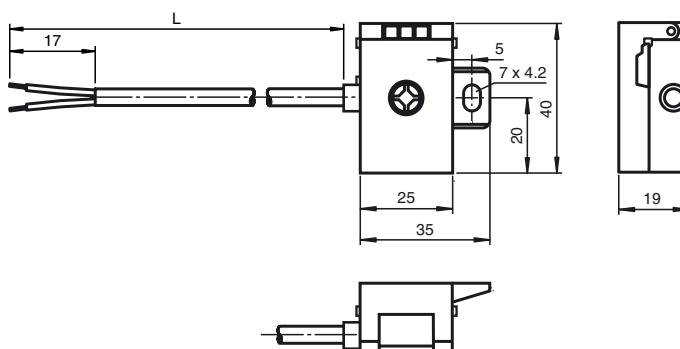

Model Number


VAZ-T1-FK-0,15M-PUR

Splitter box AS-interface to round cable

Features

- Compact design
- Fixing component with captive screw
- Simple and fast mounting
- Gold plated contacts
- Housing made of fibre optics-reinforced plastic
- Polarity reversal protected

Electrical connection

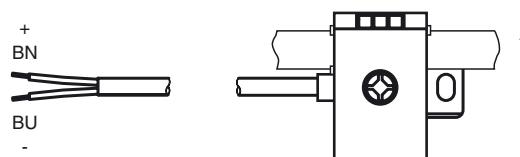

Technical data

General specifications

Construction type	Round cable outlet Flat cable clamp AS interface
-------------------	---

Electrical specifications

Rated operational voltage	U_e	≤ 35 V PELV (AS-Interface)
Rated operational current	I_e	≤ 4 A
Overvoltage protection		U_o : Over voltage category III, safe isolated power supplies (PELV)

Ambient conditions

Ambient temperature	-25 ... 75 °C (248 ... 348 K)
Storage temperature	-25 ... 85 °C (248 ... 358 K)
Degree of soiling	3

Mechanical specifications

Protection degree	IP67 / IP68 / IP69K	
Connection	AS-Interface flat cable: Insulation penetration technology Round cable: wires with crimp receptacles	
Material		
Housing	PA 66-GF25 Ultramid	
Cable	PUR	
Cable		
Sheath diameter	Ø4.8 mm	
Colour	black	
Cores	2 x 0.34 mm ²	
Length	L	150 mm
Mass		25 g
Tightening torque, fixing screws		1.65 Nm

Compliance with standards and directives

Standard conformity	
Protection degree	EN 60529