




Model Number

NBB4-12GM45-E2-M-150MM-3DT04
Mobile Equipment Series

Features

- 4 mm flush
- Increased operating distance
- Extended temperature range - 40 ... +85 °C
- 3-pin Deutsch connector (DT04)
- 100 V/m radiated field immunity


Connection



Wire colors

A	BN
B	BU
C	BK

Dimensions

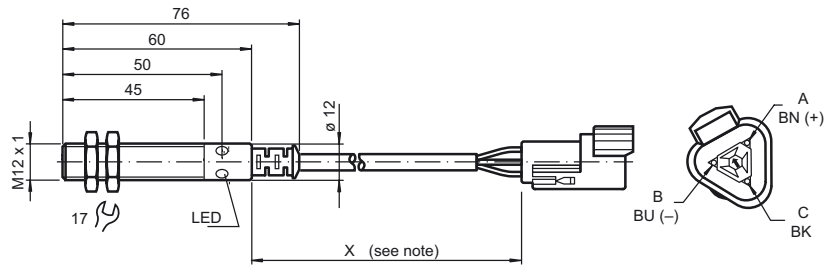

Technical Data

General specifications

Switching element function	PNP	NO
Rated operating distance	s_n	4 mm
Installation		flush
Output polarity		DC
Assured operating distance	s_a	0 ... 3.24 mm
Reduction factor r_{A1}		0.39
Reduction factor r_{Cu}		0.35
Reduction factor r_{304}		0.75

Nominal ratings

Operating voltage	U_B	10 ... 60 V
Switching frequency	f	0 ... 800 Hz
Hysteresis	H	typ. 5 %
Reverse polarity protection		yes
Short-circuit protection		yes
Voltage drop	U_d	≤ 2.5 V
Operating current	I_L	0 ... 200 mA
Off-state current	I_r	0 ... 0.5 mA typ. 0.1 μ A
No-load supply current	I_0	≤ 15 mA
Time delay before availability	t_v	≤ 5 ms
Indication of the switching state		all direction LED, yellow

Functional safety related parameters

MTTF _d	1530 a
Mission Time (T_M)	20 a
Diagnostic Coverage (DC)	0 %

Ambient conditions

Ambient temperature	-40 ... 85 °C (-40 ... 185 °F)
---------------------	--------------------------------

Mechanical specifications

Connection type	Cable connector Deutsch DT04 , 3-pin with PUR cable 150 mm
Core cross-section	0.75 mm ²
Housing material	brass, nickel-plated
Sensing face	PBT
Protection degree	IP69K
Mass	120 g
Note	X = 150 mm

Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007

Approvals and certificates

Protection class	II
Rated insulation voltage	U_i 60 V
Design-impulse-voltage withstand	U_{imp} 800 V
UL approval	cULus Listed, General Purpose
e1 Type approval	2006/28/EG

Release date: 2012-11-15 13:32 Date of issue: 2012-11-15 913653_eng.xml

Installation hint

Emitted interference and interference immunity in accordance with motor vehicle directive 2006/28/EG (e1 Type approval)
 Interference immunity in accordance with DIN ISO 11452-2:
 Severity IV 100 V/m
 Frequency band 200 MHz up to 2 GHz
 Interference immunity to DIN ISO 11452-3:
 Severity IV 200 V/m
 Frequency band 0.15 MHz to 200 MHz
 Mains-borne interference in accordance with ISO 7637-2:

Pulse	1	2a	2b	3a	3b	4	5
Severity level	IV	IV	IV	IV	IV	IV	IV
Failure criterion	C	A	C	A	A	A	C

EN 61000-4-2: CD: 8 kV / AD: 15 kV
 Severity level IV IV
 EN 61000-4-3: 10 V/m (80...1000 MHz)
 Severity level III
 EN 61000-4-4: 2 kV
 Severity level III
 EN 61000-4-5: Supply line to line 0.5 kV
 Severity level I
 EN 61000-4-6: 10 V (0.15...80 MHz)
 Severity level III
 EN 55011: Class B

Release date: 2012-11-15 13:32 Date of issue: 2012-11-15 913653_eng.xml